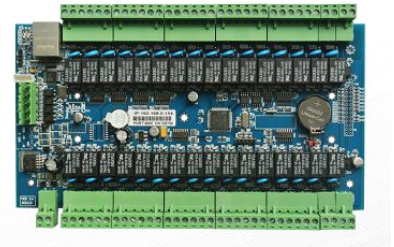


Reliable elevator controller for you building

The Akuvox EC32 is one of TCP/IP elevator controller which use standard industrial TCP/IP to communicate with PC. There is no limitation of device quantity. Each controller panel has 32 outputs and can connect an expansion panel to reach 64 outputs.

***At a Glance***

- High performance 32bit CUP processor;
- Standard 10/100M TCP/IP communication;
- Big capacity flash chip, 120,000 card holders and 200,000 records;
- Each panel support 32 outputs and can connect a expansion panel to reach 64 outputs;
- One RS485 port for connecting expansion panel;
- Support emergency door release input to realize fire alarm linkage or elevator's normal usage if emergency;
- Support 1 wiegand reader with wiegand 26/34 protocol;
- Support working with Akuvox intercom devices by HTTP mode;
- Support the installation with the wall-mounted box(optional);

Physical & Power

- | | |
|--|---|
| <ul style="list-style-type: none"> • Communication: TCP/IP • RS485: Support • User: 120,000 • Event: 200,000 • Relays out: 32 • Wiegand port: 1 x Wiegand 26/34 • RJ45 port: 1 • Fire alarm input: 1 | <ul style="list-style-type: none"> • Working voltage: 12V • Working current: <300mA • Rated power: ≤5W • Data protection if no power supply: 10 years; • Working temperature: <60C° • Working humidity: 10%~90% • Panel dimension: 218 x 136 x 32 (mm) • Panel weight: 450g |
|--|---|