


RG-EST350 V2

5GHz Dual-stream 802.11ac

5KM Wireless Bridge

DATASHEET

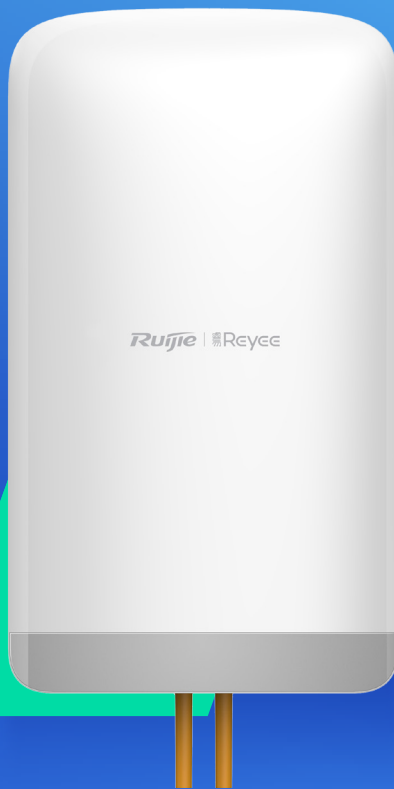

Highlights

- RG-EST350 V2 can easily transmit data from 5KM away in real time
- Automatic pairing at long distance, without complex alignment
- IP54 Weatherproof, -30°C~65°C guarantee stable operating at outdoor environment
- Support maximum 45 x 2MP cameras loading at 3KM, 20 x 2MP cameras loading at 5KM
- Visually Intuitive statistics monitoring on Ruijie cloud, easy maintenance at remotely

Highlight Features

RG-EST350v2

5GHz Dual-stream 802.11ac Next-generation Wireless Bridge




2x2 MIMO 5GHz 2x2 MIMO

2 x GE Ports

Long Range

High-speed wireless data transmission at 5KM range

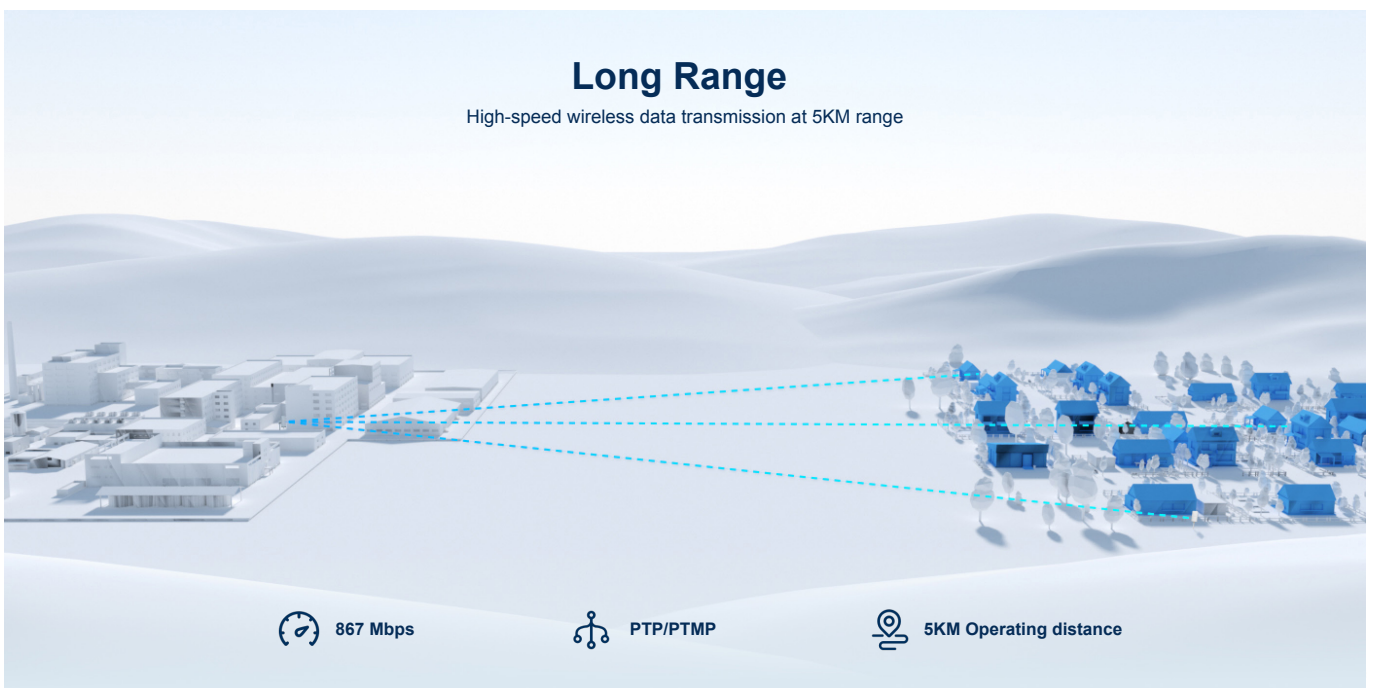

867 Mbps

PTP/PTMP

5KM Operating distance

Highlight Features

High Capacity

45 cameras maximum at 3KM, 20 cameras maximum at 5KM*



3KM

2MP

x 45 Units



5KM

2MP

x 20 Units

*H.265, 2MP Cameras, 3Mbps. To guarantee the transmission quality, the environment should be kept as open as possible to reduce the interference. At the same time, it is recommended to adjust it to the best alignment angle with the signal strength indicator or Ruijie Cloud APP.

Reliable



V0 level
flame retardant



IP54
Weatherproof




-30~65°C operating
temperature

Highlight Features

Convenient


Zero configuration automatic pairing
Plug and Play

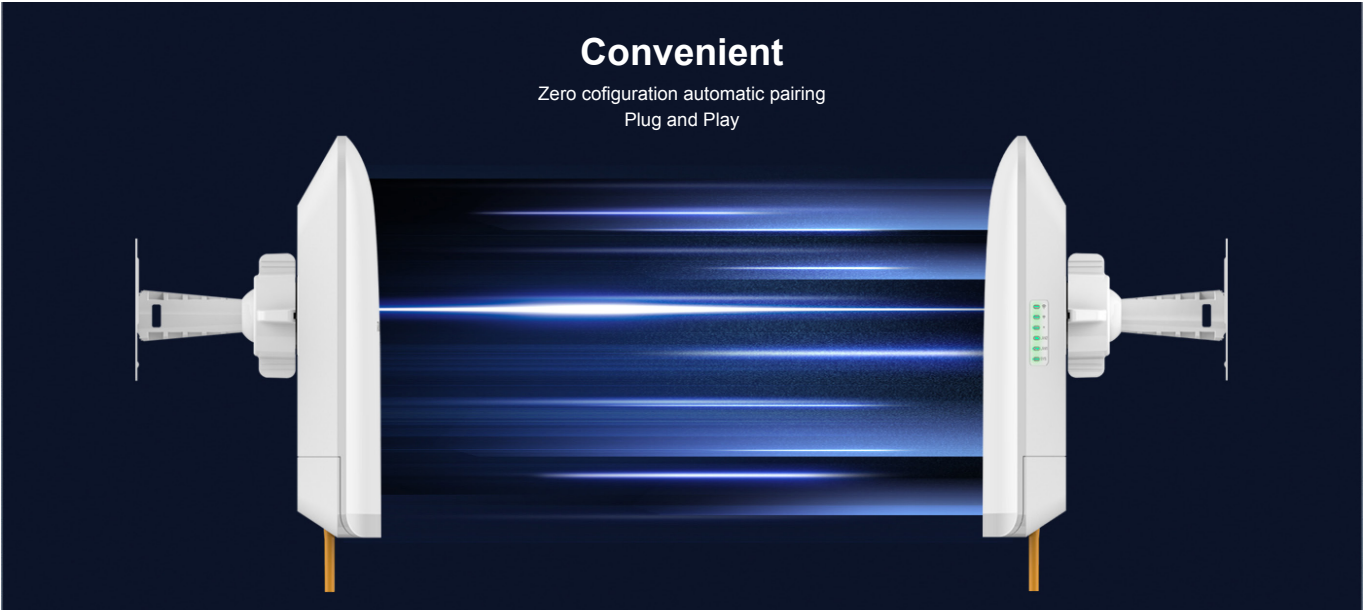

Easy to Install



Cloud, Make Your Business Easy

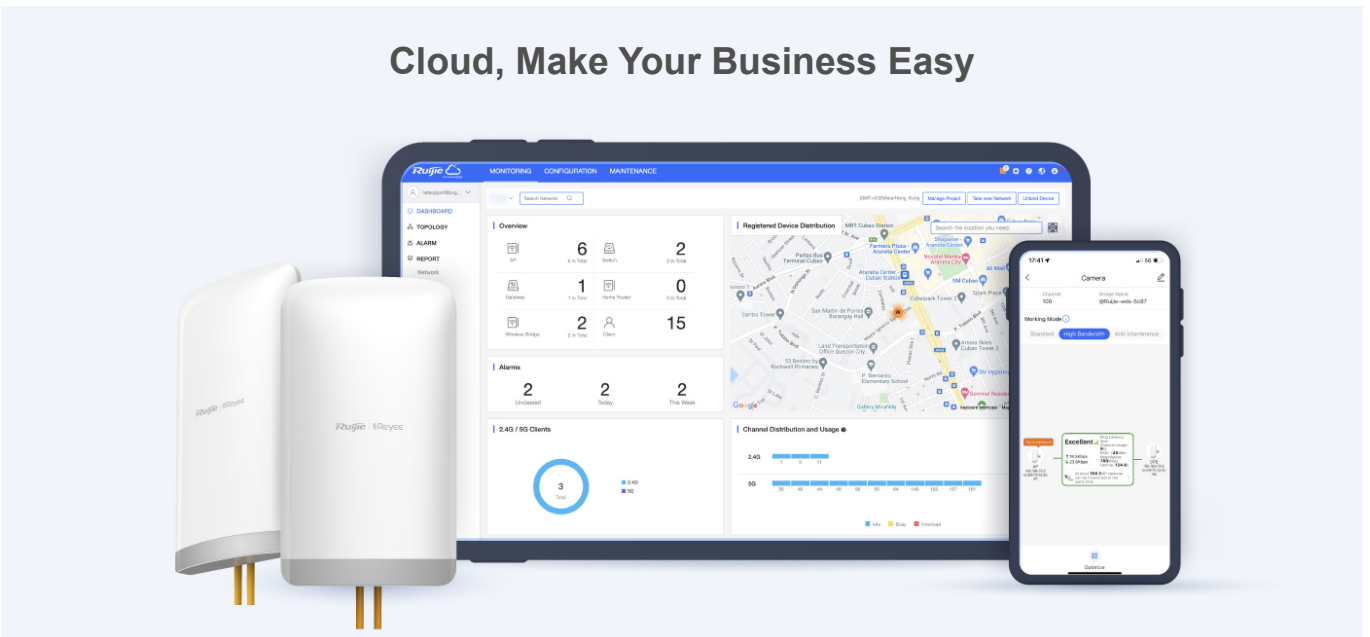

MONITORING CONFIGURATION MAINTENANCE

Search Network

Overview

6	2
1	0
2	15

Alarms

2	2	2
Unresolved	Today	This Week

2.4G / 5G Clients

3

2.4G
5G

Registered Device Distribution

Channel Distribution and Usage

17:11 Camera

Working Mode: High Performance

Excellent

17:11

Specifications

Basic

Radio Design	5 GHz Single-Band Dual-Stream
Operating Band	802.11a/n/ac: 5.150~5.350GHz, 5.470~5.725GHz, 5.725~5.850GHz (country specific)
Antenna	Directional antennas, 15 dBi
Polarization	Horizontal: 31°, Vertical: 14°
Bridging Distance	5 KM (recommended)
Spatial Streams	2x2, MU-MIMO
Memory/Flash	128 MB/8 MB
Maximum Throughput	Up to 867 Mbps at 5 GHz
Ports	2 10/100/1000Base-T Ethernet ports, port 1 with Passive PoE
Max. Transmit Power	≤400 mW(26 dBm) (adjustable)
IP Rating	IP54
Lightning Protection	4 KV
Installation	Wall-mounted/ Pole-mounted
Weight	0.5 kg
Dimensions (D x W x H)	230 mm × 132 mm × 48 mm

Software Features

IPv4	
802.1Q VLAN	✓
Multi-VLAN Transparent Transmission	✓
ARP	256
Max. Concurrent Connections	8000
Ping	✓
Traceroute	✓

Specifications

Software Features

IPv4

Unicast traffic

✓

DHCP Client

✓

DNS Client

✓

Static IP address

✓

IP Collision Avoidance

✓

Management IP

192.168.120.1

Routing

Default Route

✓

Wireless

SSID/SSID Hiding

✓

Password

Open / WPA-PSK / WPA2-PSK / WPA/WPA2-PSK

RSSI

-58 dBm@1KM
-66 dBm@3KM
-70 dBm@5KM

Performance

230 Mbps@1KM(HT40)
200 Mbps@3KM(HT40)
150 Mbps@5KM(HT40)

One-Click Optimization

✓

DFS

✓

Local Forwarding

✓

WLAN QoS

WMM

Management

Zero Provisioning on Cloud

QR-Code / Serial Number

CWMP(TR069) Support

✓

Point-to-Point

✓

Specifications

Software Features

Management

Point-to-Multipoint	Recommended 3
Self-Organizing Network	Max. 200 wireless bridges
AP/CPE Switchover	✓
Interface Configuration	✓
Country Code	176 countries support, details refer to Country&Region Code reference
Clock setting	✓
Time Zone	✓

Maintanance

Alarm	IP address conflict / SSID / Offline
Diagnostics	✓
Reboot	✓
Reset	✓

Cloud Features

Remote Access	✓
Remote Reboot	✓
Statistics Monitoring	✓
Working mode	Normal / High performance / Anti-interference
Remote SSH	✓
Remote EWeb	✓

Camera Reference

3Mbps Video Bit Rate	50 Units/1KM 45 Units/3KM 20 Units/5KM
----------------------	--

Specifications

Software Features

Camera Reference

4-5Mbps Video Bit Rate	30 Units/1KM 25 Units/3KM 12 Units/5KM
6Mbps Video Bit Rate	20 Units/1KM 13 Units/3KM 8 Units/5KM

Hardware Features

Physical Features

LED indicator	LEDs indicate the bridging quality: LED off: No bridging One LED blinking: <-75dBm One LED on: -75dBm< RSSI <-73dBm One LED on and one LED blinking: -73dBm< RSSI <-71dBm Two LEDs on: -71dBm< RSSI <-68dBm Two LEDs on and one LED blinking: -68dBm< RSSI <-64dBm Three LEDs on: >-64dBm
---------------	--

Hardware Button	1 reset button
-----------------	----------------


Power Supply	12 VDC power supply or 24 VDC Passive PoE
--------------	---

Power Consumption	< 9W
-------------------	------


Environment	Operating temperature: -30°C to 65°C (-22°F ~ 149°F) Storage temperature: -40°C to 85°C (-40°F ~ 185°F) Operating humidity: 5% to 95% (noncondensing) Storage humidity: 5% to 95% (noncondensing)
-------------	--

MTBF	> 250,000H
------	------------


Antenna Polarization

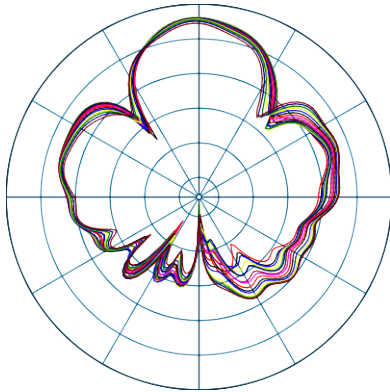


Vertical Azimuth

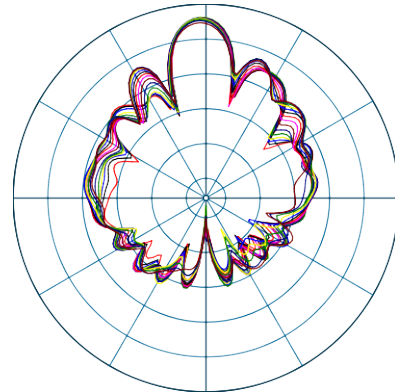

Vertical Elevation

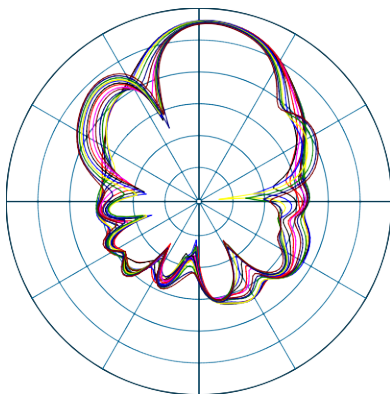

Horizontal Azimuth

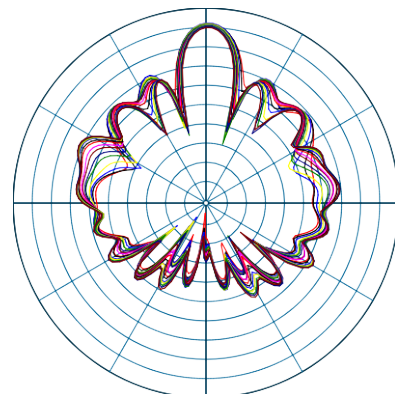

Horizontal Elevation

Package Contents

Device	RG-EST350 V2 * 2
Mounting Bracket	2
Hose Clamps	2
Universal Joint Assemblies	2
Power supply	Power adapter * 2
User Manual	1
Wall Anchors	6
Phillips Pan Head Screws	8
Package Weight	2.3 kg
Package Dimension (w x d x h)	490 mm * 363 mm * 80 mm

Ruijie | Rcycc

 **Redefine your easy network**

Copyright ©2000-2022 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd
Floor 11, East Wing, Zhongyipengao Plaza,
No.29 Fuxing Road, Haidian District, Beijing China
Website: <https://www.ruijienetworks.com>