


# Tiandy

TC-C32LPR Spec: I7/200KM/H/Y/M/5.3-66MM

## 2Mp LPR Bullet Camera

LPR Series

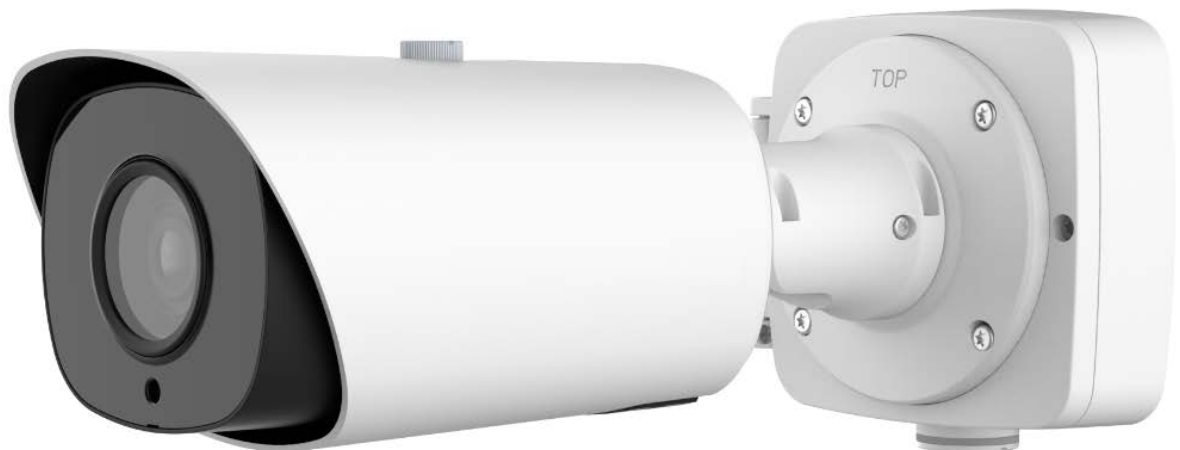


### KEY FEATURES

- Suitable for parking lot entrance and exit
- Built-in deep learning LPR algorithm
- Support license plate recognition
- 1/2.8" CMOS
- 2MP(2560x1440)
- 5.3-64mm
- Max. Vehicle Speed 200km/h
- Frame rate 90fps
- 140dB
- S+265, H.265, H.264, Motion JPEG
- Built-in MicroSD card slot up to 512 GB
- IP67



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com.ua](mailto:sales@tiandy.com.ua) Tel: +38 0443344810  
Website: [tiandy.com.ua](http://tiandy.com.ua)

	Name	Tiandy Bullet LPR Camera
<b>Camera</b>	Appearance  Model  Image Sensor  Min. Illumination  WDR  Shutter Time  Day/Night Mode  S/N	  <b>TC-C32LPR (2MP)</b>  1/2.8" Progressive Scan CMOS  Color: 0.005Lux@F1.6  B/W: 0Lux with IR on  140dB Super WDR  1/100000s~1s  Day/Night/Auto/Customize/Schedule  >55dB
<b>Lens</b>	Lens  Field of View  Mount  Focus Control  Aperture  Iris Control	5.3~64mm, 12X Optical Zoom  H61°~H5°/D69°~D5°/V36°~V2°  Φ14  Auto/Manual  F1.6~F2.8  Auto
<b>Road Traffic Management</b>	Max. Vehicle Speed  Recognition Accuracy  Coverage  Country Region Supported  Illumination Distance  Attributes Identification  Smart Traffic Function  White/Black List  LPR Smart Search	200km/h  >95%  Support simultaneous detection of 4 regions  More than 80 countries and regions  Up to 70m during the day; Up to 35m during the night with illumination  Plate Color, Vehicle Type, Vehicle Color, Vehicle Brand, No-plate Vehicle Capture, Vehicle Direction Detection, Evidence Camera Linkage, Specific Lane Management  Up to 1000 records inside the camera  Support
<b>Interface</b>	Ethernet  Audio I/O  Alarm I/O	1*RJ45 10M/100M Ethernet Port  1/1  2/2
<b>Video</b>	Max. Image Resolution           Primary Stream           Secondary Stream	1920x1080           60Hz/50Hz: 90fps@(1920x1080, 1280x960, 1280x720, 704x576)           60Hz: 60fps@(704x576, 640x480, 640x360, 352x288, 320x240) 50Hz: 50fps@(704x576, 640x480, 640x360, 352x288, 320x240)

<b>Video</b>	Tertiary Stream Video Compression Video Bit Rate Privacy Masking ROI Image Setting	60Hz: 30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240) 50Hz: 25fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240) H.265*/H.265(HEVC)/H.264*/H.264/MJPEG 16Kbps~16Mbps(CBR/VBR Adjustable) Up to 8 Areas (Mask Area and Mosaic Area are optional) Up to 8 areas Brightness/Contrast/Saturation/Sharpness
<b>Network</b>	Network Storage Protocol	NAS(Support NFS, SMB/CIFS), ANR IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL
<b>Audio</b>	Audio Compression Audio Sampling Rate Audio Bit Rate Two-way Audio	G.711/AAC/G.722/G.726 8/16/32/44.1/48KHz 16~256kbps Support
<b>System</b>	System Compatibility Storage Advanced Function SIP/VoIP Support Event Trigger Event Action	API, HTTP, TCP, ONVIF Profile G & Q & S & T Support microSD/SDHC/SDXC Card Local Storage, up to 256G BLC, HLC, 2D DNR, 3D DNR, Defog, AWB, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur, Watermark Yes, Voice & Video-over-IP Black/White List, Attributes Event, Motion Detection, Network Disconnection, External Input, Audio Alarm, etc. FTP Upload, SMTP Upload, SD Card Record, External Output, SIP Phone, HTTP Notification, etc
<b>General</b>	Working Temperature Working Humidity Power Supply Power Consumption Weather Proof Housing Surge Protection Weight Dimensions Warranty	-40°C~60°C 0~95%(Non-condensing) PoE (802.3at) / DC 12V±10% 8W MAX 14W MAX (With IR on) Up to IP67-rated for Weather-resistant Performance Vandal-proof IK10-rated Metal Housing 4KV 1445.8g 320mmX134mmX126mm 3/5 Years




**Tiandy Technologies Co.,Ltd.**

Email: sales@tiandy.com.ua Tel: +38 0443344810  
Website: tiandy.com.ua



# Tiandy

## DIMENSIONS (Unit: mm)

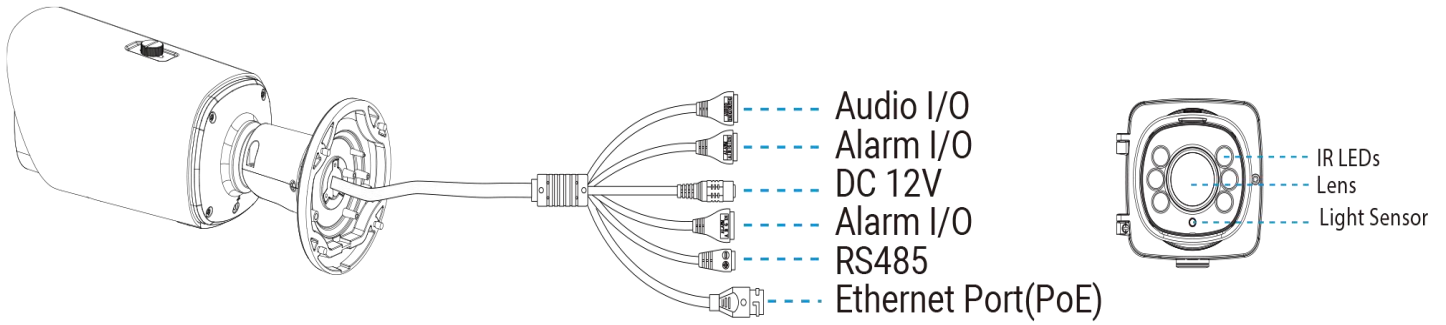

microSD/SDHC/SDXC Card Slot


Reset

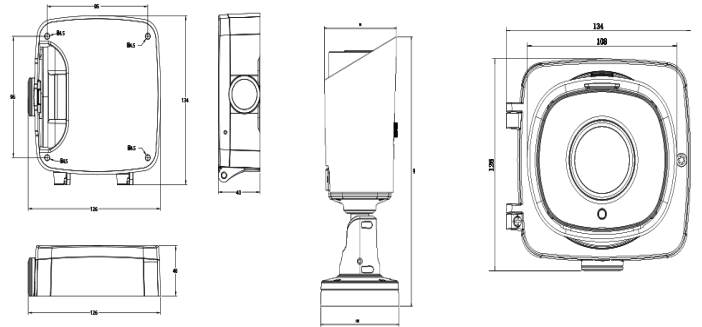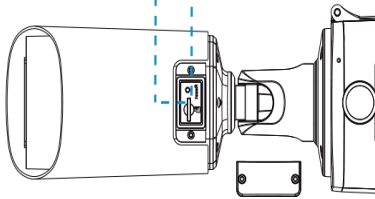

## ACCESSORIES



A36  
Pole Mount



A35  
Corner Mount



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com.ua Tel: +38 0443344810  
Website: tiandy.com.ua